# P-AFE12BT-D-PK

Series 1200E freezer cabinet, PK door, low temperature, with gas R290, D class

Technology, design and production 'Made in Italy'
Stainless-steel interior and exterior. Galvanised steel external base, top and back
Rounded internal corners
High-pressure injected CFCs free polyurethane insulation
Door reversible with kit;
Front electronic control panel with 2 NTC thermistors
Automatic defrosting and condensate evaporation
Height-adjustable stainless-steel feet (110/180 H mm)
Predisposition for led lighting and lock (optional)
Easy installation, ready to use

ENERG

A
B
C
D
E
F
G

**3253,98** kWh/annum

Standard set-up:
Racks
6 pairs of runners
6 plasticized grids 530x550 mm
Fan stop
Door edge resistance

# P-AFE12BT-D-PK

Series 1200E freezer cabinet, PK door, low temperature, with gas R290, D class

| | |
|---|---|
| Operating temperature °C | -18/-22 |
| Energy consumption/year (AEC-kWh) | 3253,98 |
| Net volume (lt) | 769,56 |
| Climate class - Safety standard IEC-EN 609335-2-89 | 5 |
| Climate class - Test conditions | 4 (30°C - 55%) |
| Refrigerant gas | R290 |
| GWP | 3 |
| LwA dB(A) | 42 |
| Refrigeration | MONOBLOCK-VENTILATED |
| Defrosting | AUTOMATIC WITH HOT GAS |
| Condensation evaporation | AUTOMATIC |
| Voltages (V) | 230 1N |
| Frequency (Hz) | 50 |
| Power supply (W) | 950 |
| Supply current (A) | 4,5 |
| Material | INOX 18/10 |
| Insulation thickness (mm) | 60 |
| Feet height (mm) | FROM 110 TO 180 |
| Grids | 6 |
| Grid dimensions (mm) | 530x550 |
| Dimensions with packaging (mm) LxWxH | 1450X760X2090 |
| Dimensions without packaging (mm) LxWxH | 1420x700x2030/2100 |
| Gross weight (kg) | 175 |
| Net weight (kg) | 142 |

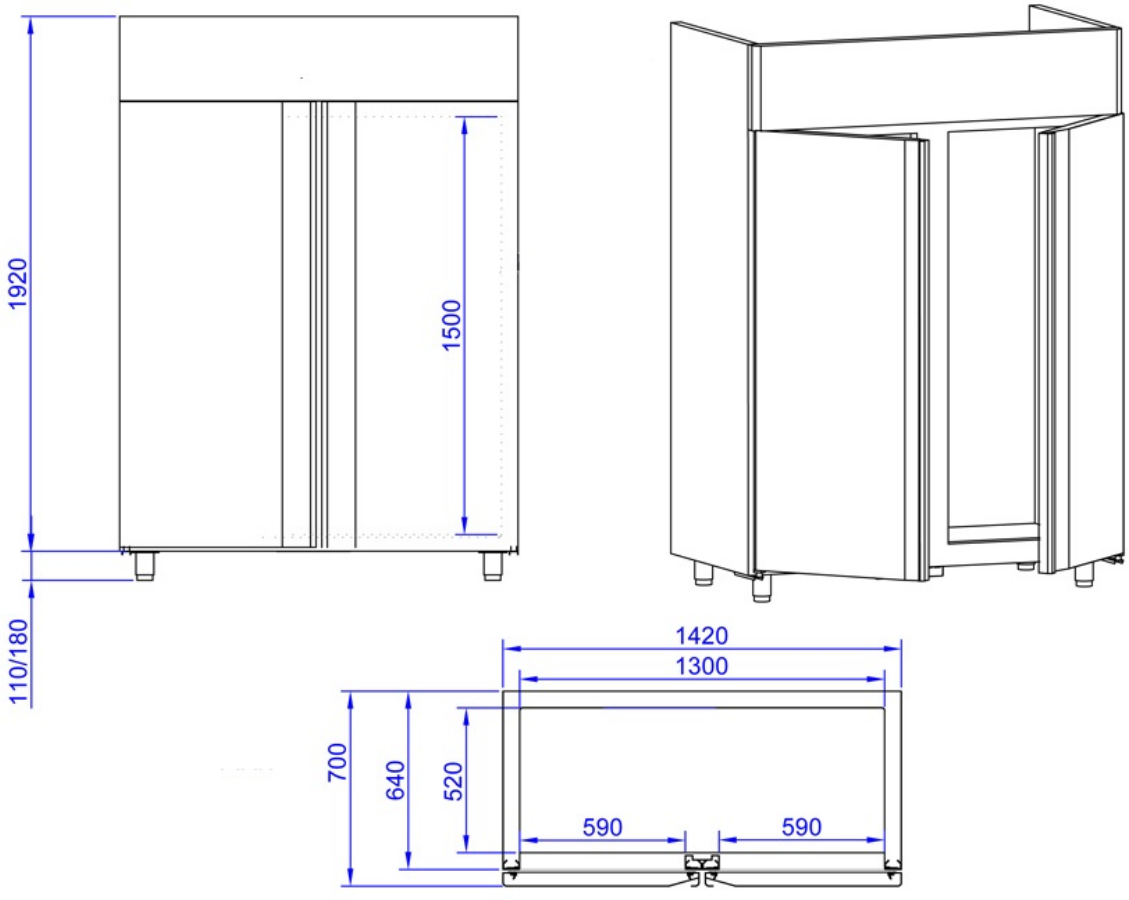



Immagini e dimensioni indicative / Approximate pictures and size
I dati tecnici possono variare senza preavviso / Technical data may change without notice