P-AFE04TN-A-PV

Series 400E refrigerated cabinet, operating temperature -2/+8, glass door, with gas R290, A class

Technology, design and production 'Made in Italy'
Stainless-steel interior and exterior. Galvanised steel external base, top and back
Rounded internal corners
High-pressure injected CFCs free polyurethane insulation
Door reversible with kit;
Front electronic control panel with 2 NTC thermistors
Automatic defrosting and condensate evaporation
Height-adjustable stainless-steel feet (110/180 H mm)
Predisposition for led lighting and lock (optional)
Doubleglazed glass door
Easy installation, ready to use

ENERG

1542,57 kWh/annum

Standard set-up:
Racks
3 pairs of runners
3 plasticized grids GN 2/1
Fan stop
Led light inside

P-AFE04TN-A-PV

Series 400E refrigerated cabinet, operating temperature -2/+8, glass door, with gas R290, A class

Operating temperature °C	-2/8
Energy consumption/year (AEC-kWh)	1542,57
Net volume (lt)	272
Climate class - Safety standard IEC-EN 609335-2-89	5
Climate class - Test conditions	4 (30°C - 55%)
Refrigerant gas	R290
GWP	3
LwA dB(A)	42
Refrigeration	MONOBLOCK-VENTILATED
Defrosting	AUTOMATIC WITH HOT GAS
Condensation evaporation	AUTOMATIC
Voltages (V)	230 1N
Frequency (Hz)	50
Power supply (W)	230
Supply current (A)	1,15
Material	INOX 18/10
Insulation thickness (mm)	50
Feet height (mm)	FROM 110 TO 180
Grids	3
Grid dimensions (mm)	500x440
Dimensions with packaging (mm) LxWxH	670x670x1950
Dimensions without packaging (mm) LxWxH	600x620x1910/1980
Gross weight (kg)	112
Net weight (kg)	101

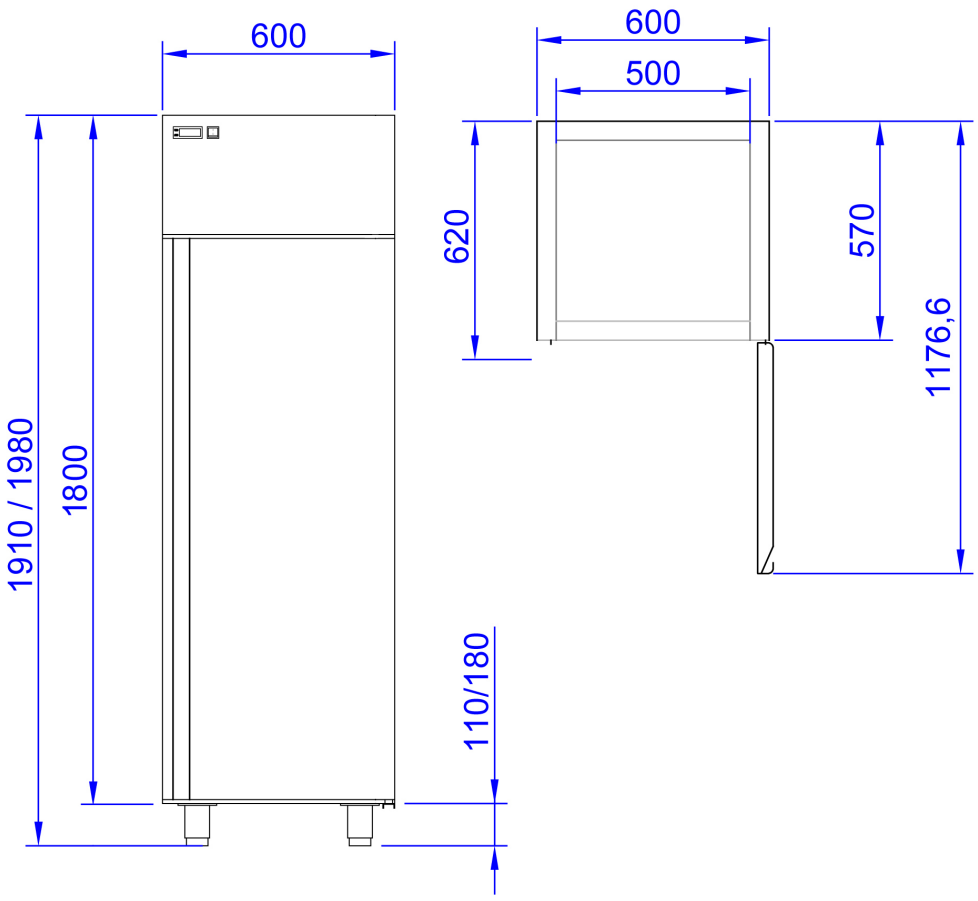

Immagini e dimensioni indicative / Approximate pictures and size
I dati tecnici possono variare senza preavviso / Technical data may change without notice