P-VR3200

Refrigerated stainless steel display, with straight tempered glass or without glass, size 1/3 GN, R290 L2000

Technology, design and production 'Made in Italy'
Refrigerated display made entirely in stainless steel
Gas R290
Suitable to position 1/1 - 1/2 - 1/3 - 1/4 - 1/6 - 1/9 bowls with a maximum height of 150 mm
Available versions with or without glass, free standing or with stainless steel feet support kit
Static refrigeration with built-in condensing unit
Electronic front control panel with 1 NTC probe
Off-cycle defrosting
Kit of no. 4 feet adjustable up to 20 mm
Available in various lengths
Possibility to have the motor compartment on the right or left
Also available without built-in unit
Easy installation, ready to use

DISPONIBILE NELLE MISURE

Available in the following dimensions (mm)

120	140	150	160	190
L 1200	L 1400	L 1500	L 1600	L 1900
200	203	215	240	270
L 2000	L 2030	L 2150	L 2400	L 2700

Standard set-up:
Standard packaging: cardboard

P-VR3200

Refrigerated stainless steel display, with straight tempered glass or without glass, size 1/3 GN, R290 L2000

Operating temperature °C	+3 / +5
Climate class	4
Refrigerant gas	R290
GWP	3
LwA dB(A)	42
Refrigeration	STATIC
Defrosting	OFF-CYCLE
Voltages (V)	230 1N
Frequency (Hz)	50
Power supply (W)	160
Supply current (A)	1,73
Material	INOX 18/10
Feet height (mm)	FROM 9 TO 29
Capacity in number of 1/3 GN trays	8
Straight glass model (VD) dimensions (mm)	2000x387x475(495)
Straight glass model (VD) packaging dimensions (mm)	2060x420x400
Straight glass model (VD) net weight (kg)	57
Straight glass model (VD) gross weight (kg)	62
Without glass model (SV) dimensions (mm)	2000x387x236(256)
Without glass model (SV) packaging dimensions (mm)	2060x420x400
Without glass model (SV) net weight (kg)	32
Without glass model (SV) gross weight (kg)	37

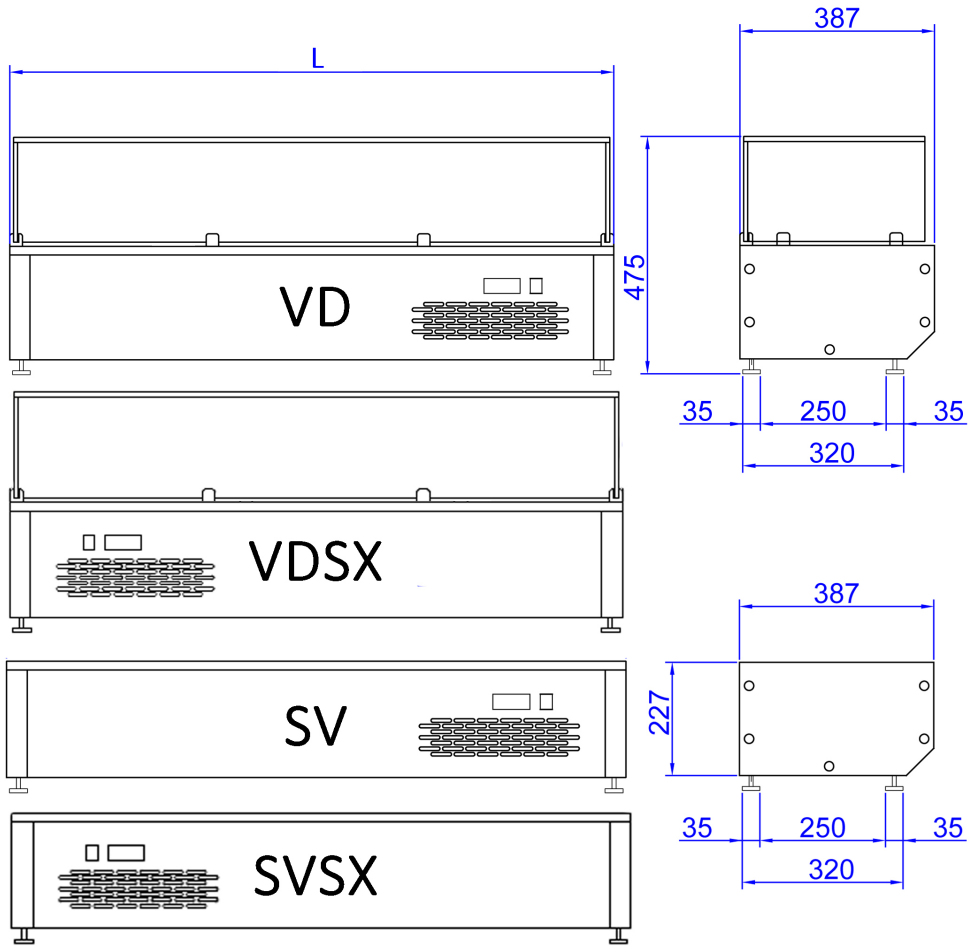

Immagini e dimensioni indicative / Approximate pictures and size
I dati tecnici possono variare senza preavviso / Technical data may change without notice