P-ATT10TH

Attila touch screen blast chiller in stainless steel for 10 GN1/1 trays - 600x400 mm with gas R290

Technology, design and production 'Made in Italy'
Stainless steel interior and exterior, with the exception of the external base in galvanised steel
Rounded internal corners
High-pressure injected CFCs free polyurethane insulation
Self-closing door with hinges on the left and magnetic gasket
Front panel with electronic control board
Condensing unit with openable front grid for easy maintenace
Gas R290
Evaporator with anti-corrosion cataphoresis treatment
Defrosting with open door, without the use of heaters or hot gas
Removable bottom tray for condensate water collection
Simple and intuitive touch screen control
Kit of no. 4 adjustable stainless steel feet (height: 60/80 mm)
Suitable for both GN1/1 grids and 600x400 mm trays
Easy installation, ready to use

Standard set-up:
A chamber probe
A core probe
10 pairs of universal stainless steel GN1/1 runners -600x400mm
Standard packaging: pallet + cardboard

P-ATT10TH

Attila touch screen blast chiller in stainless steel for 10 GN1/1 trays - 600x400 mm with gas R290

Energy consumption for chilling function (kWh/kg)	0,0455
Chilled full load capacity (kg)	25
Blast chilling time for maximumload from +65°C to +10°C (min)	62
Energy consumption for freezing function (kWh/kg)	0.0473
Frozen full load capacity (kg)	22
Blast freezing time for maximumload from +65°C to -18°C (min)	226
°C minimum temperature with 30°C environment and 60% RH	-40
Refrigerant gas	R290
GWP	3
Climate class	4
Refrigeration	VENTILATED
Defrosting	WITH OPEN DOOR
Insulation thickness (mm)	60
Voltages (V)	230 1N
Frequency (Hz)	50
Power supply (W)	2150
Supply current (A)	10,9
Material	STAINLESS STEEL 18/10
Trays	10
Trays dimensions	GN1/1 o 600x400 mm
Feet height (mm)	FROM 60 TO 80
Dimensions with packaging (mm) LxWxH	800x800x1480
Dimensions without packaging (mm) LxWxH	754x756x1312/1332
Gross weight (kg)	122
Net weight (kg)	112

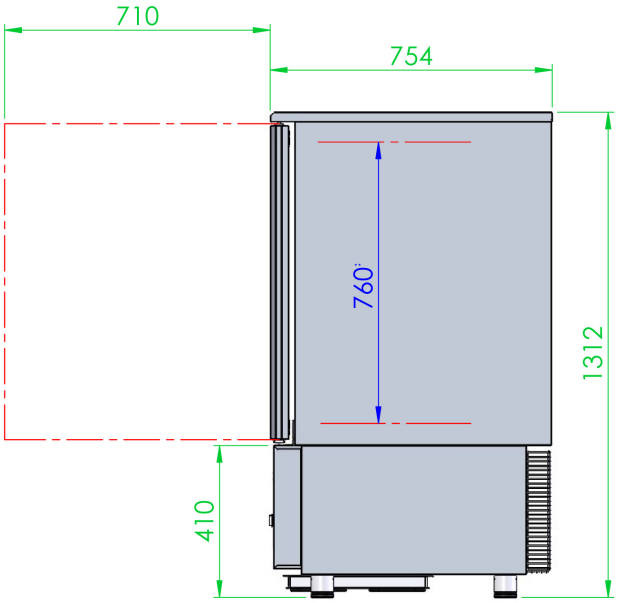

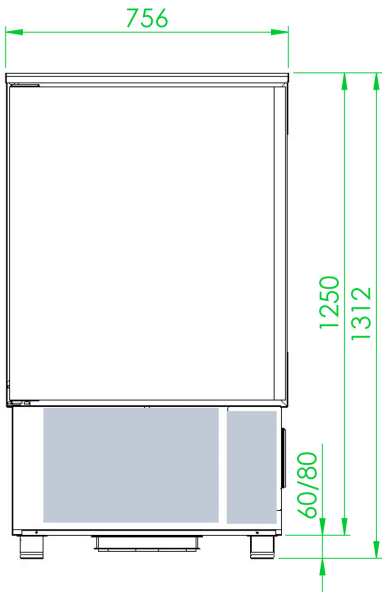

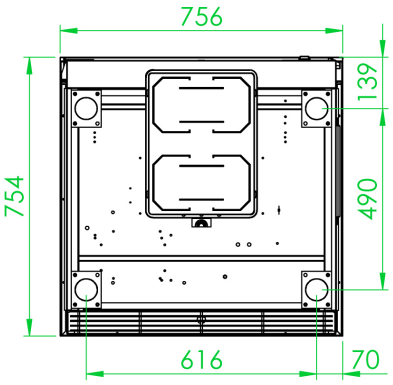

Immagini e dimensioni indicative / Approximate pictures and size
I dati tecnici possono variare senza preavviso / Technical data may change without notice